

MetalCom CLE620 Dual Core AMD G-Series Thin Client

High performance with AMD Embedded G-Series T56E/T56N Dual Core 1.65GHz CPU and A55E chipset, 1xLAN, 6xUSB, DVI-D&DVI-I, 2xCOM, 1xPCIe thin client



Features

- AMD Embedded G-Series T56E/T56N Dual Core 1.65GHz CPU and A55E chipset
- Support dual DVI, Display Port (optional)
- Support two USB3.0 ports and four USB2.0 ports
- PCIe slot expansion
- Internal USB for smart card reader and WLAN (optional)
- TPM Support

Specification		Model	CLE620
Processor	CPU / Chipset		AMD Embedded G-Series T56E/T56N Dual Core 1.65GHz / A55E
Memory	RAM		One SO-DIMM socket supports DDR3 800/1066 up to 4GB
Display	Resolution		up to 2560 x 1600@60Hz
	Display Data Control		T56E : AMD Radeon™ HD 6250 / T56N : AMD Radeon™ HD 6320
Audio	Speaker		x 1 (Build-in 1W internal speaker)
Storage			SATAII x 1
I/O Physical	PS/2		x 1 (For K/B, support K/B & mouse by Y cable)
	COM Port		x 2 (COM2 optional)
	USB ports	Front	USB 2.0 x 2
		Rear	USB 2.0 x 2, USB 3.0 x 2
	Video	DVI-D	x 1 (Alternative to Display Port)
		DVI-I	x 1
	Audio	Mic-in	x 1
Line-out		x 1 (Speaker-out jack)	
Networking	LAN		x 1 (RJ-45, 10 / 100 / 1000 Mbps Base-T)
	WLAN		x 1 (Optional, internal USB header and mini PCIe slot for WLAN module)
Other Expansion	PCIe Slot		x 1 (Alternative to one parallel port and one COM port)
	Internal Header for Smart Card Reader		x 1
Environment	Temperature	Operation	32° to 95° F (0° to 35° C)
		Storage	-4° to 140° F (-20° to 60° C)
Relative Humidity		20% to 80% non-condensing	
Power	Power Supply		48W, DC 12V / 4A external power adapter
Mounting	Foot Stand	H or V	Vertical
Security	Kensington Lock		Yes
OS Support			Linux / Windows CE 7.0 / WES2009 / WES7 / WES8
Physical Characteristics	Chassis Housing		Plastic and metal
	Dimension	Terminal	57 (W) x 230 (H) x 210 (D) mm / N.W. : 1.72 KG
		Packing : Single Box	85 (W) x 360 (H) x 296 (D) mm
		Packing : Carton	608 (W) x 395 (H) x 455 (D) mm, 10 boxes in one carton
Regulatory Compliance			CE / FCC

MetaliCom CLE620 Dual Core AMD G-Series Thin Client

High performance with AMD Embedded G-Series T56E/T56N
Dual Core 1.65GHz CPU and A55E chipset, 1xLAN, 6xUSB, DVI-
D&DVI-I, 2xCOM, 1xPCIe thin client


Mechanical Layout/Drawing



Front Side View

Front Side View


1. Power button
2. HDD Led
3. LAN Led
4. Mic-in jack
5. Audio Line-out jack
6. Smart card reader (Option)
7. USB 2.0 ports x 2
8. Speaker

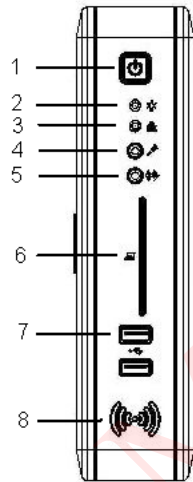

Rear Side View

Rear Side View

9. PS/2 port for K/B or Y cable
10. USB 3.0 ports x 2
11. USB 2.0 ports x 2
12. RJ-45 LAN port
13. PCIe slot (Alternative to one parallel port and one COM port)
14. DVI-D port (Alternative to one Display Port)
15. DVI-I port
16. COM port
17. DC jack
18. Kensington lock

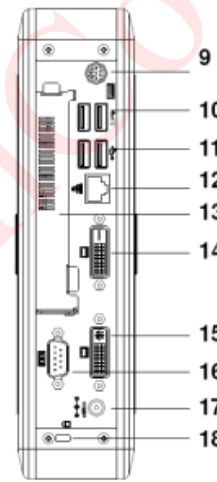

www.MetaliCom.com

