


MetaliCom-KB-SCR

Smart Card Reader Integrated Keyboard



Features	
Full-size & heavy duty design	
USB 1.1 version	
Enhanced 104-keys with large L-shaped enter key	
Support smart cards ISO 7816 Class A, AB and C	
Fully compatible for Windows 98SE/ME/ 2000/XP/Vista Windows 7 (USB interface not support Windows 98)	

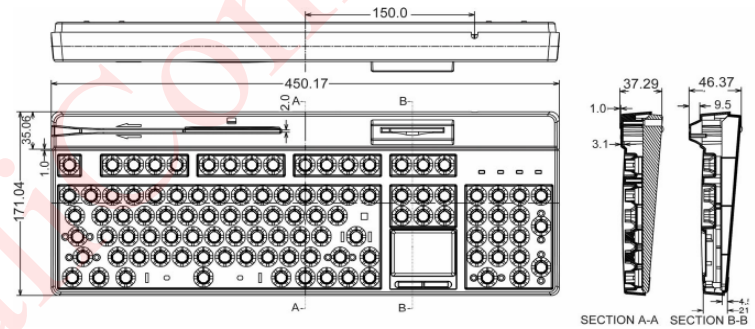

Keyboard	
Key Number	104/ 105 keys (US/ EU)
Key Switch	Membrane with 10 million life cycle time
Key Force/ Traveling Distance	50 +/- 7 gm / 4 +/- 0.5 mm
Input Power/ Interface	5 VDC, 100mA / USB 1.1 version
Key Cap	Ergonomic keycap design with 5 different height
Operating Temperature	0 to 50 degrees Celsius (10% to 95% RH, 25 degree Celsius)
Storage Temperature	-10 to 65 degrees Celsius (5% to 90% RH, 25 degree Celsius)
Smart Card Reader	
Standard	ISO7816
Protocols	T=0, T=1.2-wire; SLE 4432/42 (S=10), 3-wire; SLE4418/28 (S=9), 12C
Reading Speed/ Frequency	420 Kbps / up to 8MHz
Card Type Support	5V, 3V and 1.8V smart card ISO 7816 Class A, AB and C
API Support	PCSC, CTAPI, Synchronous-API, OCF
PCSC Driver Support	Windows 98/ME/2K/XP (32bit), 2003 Server Win, Win NT, Windows CE5.0/ CE.NET, Windows XP 64bit, Windows Vista (32bit/ 64bit), Windows 7, Linux
Reliability	500K card insertions
Dimension	450.17 (L) x 171 (W) x 46.37 (H)
Weight	1.10 kg (N.W.)/ 1.56 Kg (G.W.)